



More Precision

wire**SENSOR**


Draw-wire displacement sensors






- Robust plastic housing
- Customized versions for OEM
- Wire/hybrid potentiometer

Model MK46 Output P10/P25

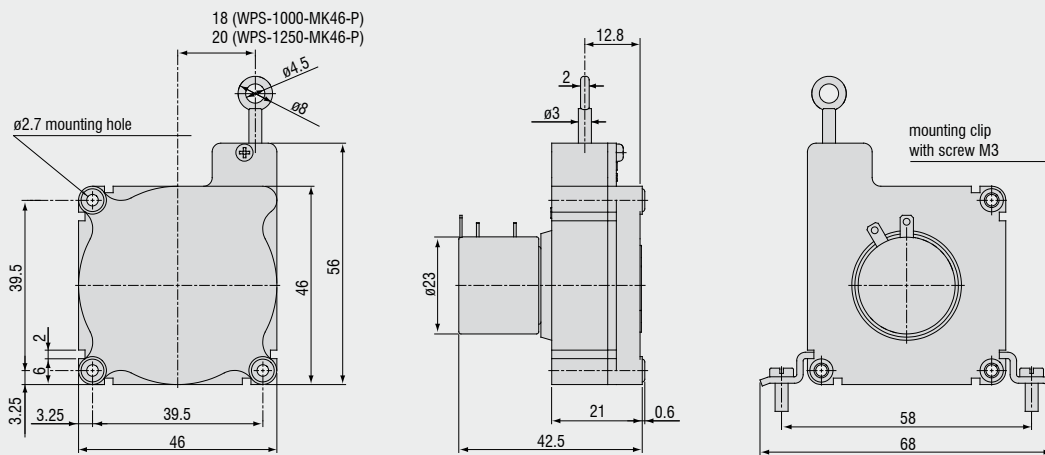

Model MK46 Output CR-P25

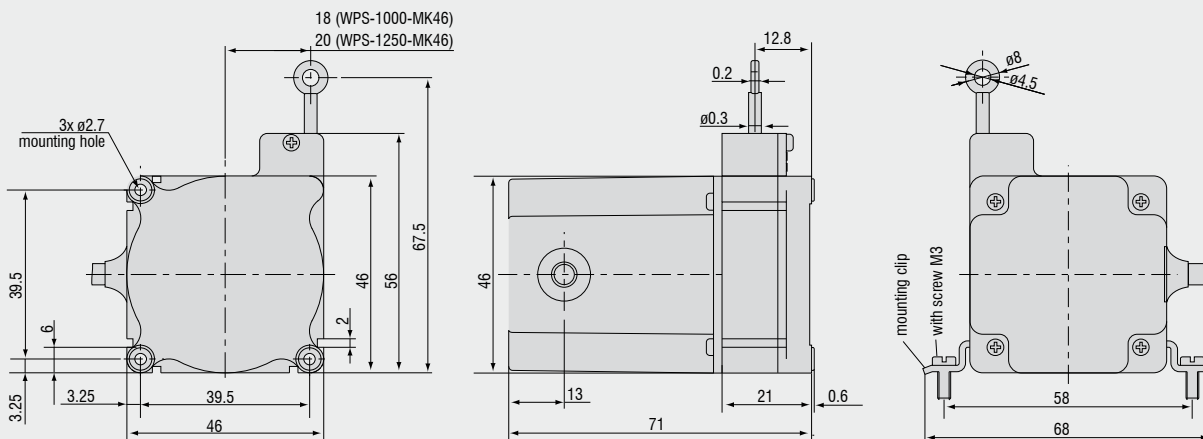

Model			WPS-1000-MK46	WPS-1250-MK46
Output			P	
Measuring range			1000mm	1250mm
Linearity	wire pot. P25	$\pm 0.25\%$ FSO	2.5mm	3.12mm
	hybrid pot. P10	$\pm 0.1\%$ FSO	1mm	1.2mm
Resolution	wire pot. P25		0.3mm	0.4mm
	hybrid pot. P10		quasi infinite	
Sensor element			wire/hybrid potentiometer	
Temperature range			-20 ... +80°C	
Material	housing		plastic	
	draw wire		coated polyamid stainless steel (\varnothing 0.36 mm)	
Wire mounting			eyelet	
Sensor mounting			mounting holes / mounting grooves	
Wire acceleration			appr. 5g	
Wire retraction force (min)			appr. 1N	
Wire extension force (max)			1.6N	1.5N
Protection class			IP 20	
Electrical connection	P10, P25		soldering tag	
	CR-P25		integrated cable, radial, 1m	
Weight			appr. 80g	

FSO = Full Scale Output
 Specifications for analog outputs on page 47.

Article description

WPS - 1000 - MK46 - P25

Output option:
 potentiometer P25 (linearity $\pm 0.25\%$ FSO)
 potentiometer P10 (linearity $\pm 0.1\%$ FSO)
 potentiometer CR-P25, integrated cable, radial, 1m


Model MK46

Measuring range in mm



- Robust plastic housing
- Customized versions for OEM
- Incremental encoder

Model MK46

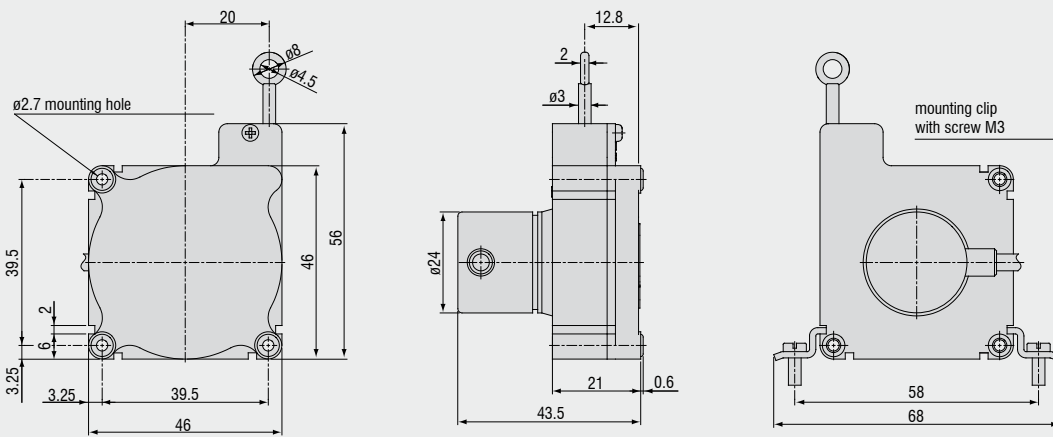

Model		WPS-1250-MK46	
Output			E/E830
Measuring range			1250mm
Linearity	encoder	±0.05% FSO	0.625mm
Resolution			4 Pulses/mm
			0.25mm
Sensor element			incremental encoder
Temperature range			-20 ... +80°C
Material	housing		plastic
	draw wire		coated polyamid stainless steel (ø 0.36mm)
Wire mounting			eyelet
Sensor mounting			mounting holes / mounting grooves
Wire acceleration			appr. 5g
Wire retraction force (min)			appr. 1N
Wire extension force (max)			1.5N
Protection class			IP54
Electrical connection			cable radial, 1m
Weight			appr. 120g

FSO = Full Scale Output
 Specifications for digital outputs on page 48.

Article description



WPS - 1250 - MK46 - E

Output option:
 encoder E (5 ... 24VDC)
 encoder E830 (8 ... 30VDC)

Model MK46

Measuring range in mm

WE-x-M4, WE-x-Clip	Wire extension x=length
TR1-WDS	Pulley wheel, adjustable
TR3-WDS	Pulley wheel, fixed
GK1-WDS	Attachment head for M4
MH1-WDS	Magnetic holder for wire mounting
MH2-WDS	Magnetic holder for sensor mounting
MT-60-WDS	Mounting clamp for WDS-P60
FC8	Female connector for WDS, 8-pin
FC8/90	Female connector 90° for WDS
PC 3/8	Sensor cable, length 3 m
PS 2010	Power supply (chassis mounting 35 x 7.5 mm); input 120/230 VAC; output 24 VDC/2.5 A; L/B/H 120 x 20 x 40 mm
WDS-MP60	Mounting plate for P60 sensors

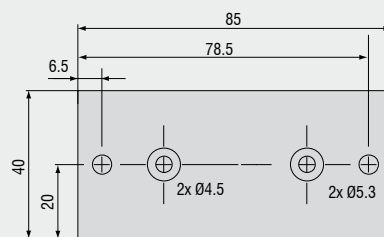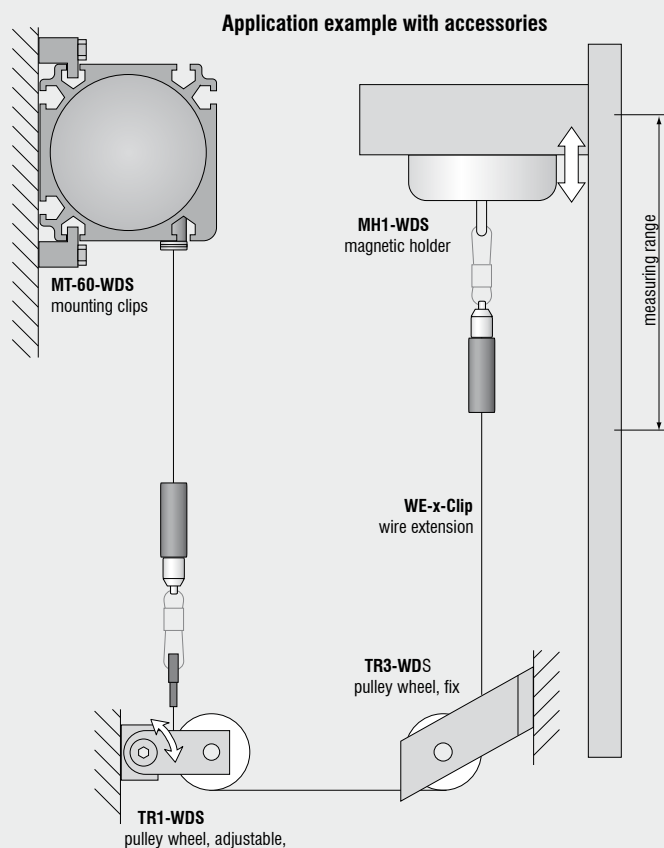


Mounting plate WDS-MP60


Installation information:

Wire attachment: The free return of the measurement wire is not permissible and it is essential that this is avoided during installation.


Wire exit angle:

When mounting a draw-wire displacement sensor, a straight wire exit ($\pm 3^\circ$ tolerance) must be taken into account. If this tolerance is exceeded, increased material wear on the wire and at the wire aperture must be expected.

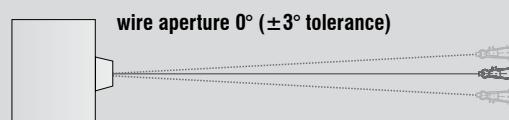


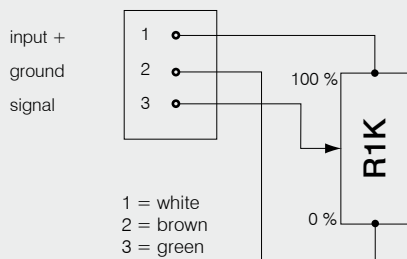

Potentiometric output (P)	
Supply voltage	max. 32VDC at 1kOhm / 1 Wmax
Resistance	1kOhm ±10% (potentiometer)
Temperature coefficient	±0.0025% FSO/°C
Sensitivity	depends on measuring range individually shown on test report

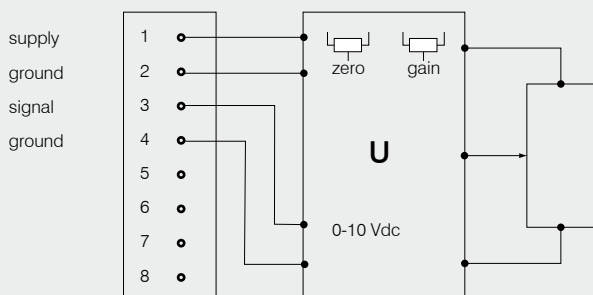

Voltage output (U)	
Supply voltage	14 ... 27VDC (non stabilized)
Current consumption	30mA max
Output voltage	0 ... 10VDC Option 0 ... 5 / ±5V
Load impedance	>5kOhm
Signal noise	0.5mV _{eff}
Temperature coefficient	±0.005% FSO/°C
Electromagnetic compatibility (EMC)	EN 50081-2 EN 50082-2
Adjustment ranges	
Zero	±20 %FSO
Sensitivity	±20 %

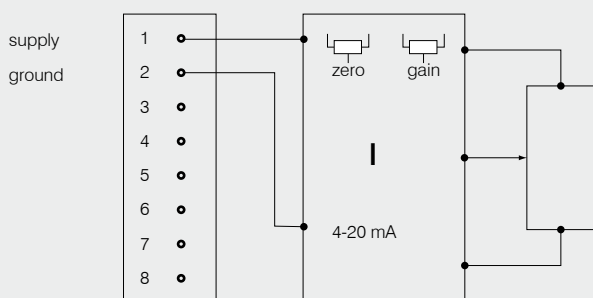

Current Output (I)	
Supply voltage	14 ... 27VDC (non stabilized)
Current consumption	35mA max
Output current	4 ... 20mA
Load	<600Ohm
Signal noise	<1.6µA _{eff}
Temperature coefficient	±0.01% FSO/°C
Electromagnetic compatibility (EMC)	EN 50081-2 EN 50082-2
Adjustment ranges	
Zero	±18% FSO
Sensitivity	±15%


Output specifications SSI

Contact description

1 UB	Encoder power supply connection.
2 GND	Encoder ground connection. The voltage drawn to GND is UB.
3 Pulses +	Positive SSI pulse input. Pulse + forms a current loop with pulse -. A current of approx. 7 mA in direction of pulse + input generates a logical 1 in positive logic.
4 Data +	Positive, serial data output of the differential line driver. A High level at the output corresponds to logical 1 in positive logic.
5 ZERO	Zero setting input for setting a zero point at any desired point within the entire resolution. The zeroing process is triggered by a High pulse (pulse duration ≥ 100 ms) and must take place after the rotating direction selection (UP/DOWN). For maximum interference immunity, the input must be connected to GND after zeroing.
6 Data -	Negative, serial data output of the differential line driver. A High level at the output corresponds to logical 0 in positive logic.
7 Pulses -	Negative SSI pulse input. Pulse - forms a current loop with pulse +. A current of approx. 7 mA in direction of pulse - input generates a logical 0 in positive logic.
8 / 10 $\overline{\text{DATAVALID}}$ $\overline{\text{DATAVALID MT}}$	Diagnosis outputs $\overline{\text{DV}}$ and $\overline{\text{DV MT}}$ Jumps in data word, e.g. due to defective LED or photoreceiver, are displayed via the $\overline{\text{DV}}$ output. In addition, the power supply of the multiturn sensor unit is monitored and the $\overline{\text{DV MT}}$ output is set when a specified voltage level is dropped below. Both outputs are Low-active, i.e. are switched through to GND in the case of an error.
9 UP/DOWN	UP/DOWN counting direction input. When not connected, this input is on High. UP/ $\overline{\text{DOWN}}$ -High means increasing output data with a clockwise shaft rotating direction when looking at the flange. UP/ $\overline{\text{DOWN}}$ -Low means increasing values with a counter-clockwise shaft rotating direction when looking at the flange.
11 / 12	Not in use

Anschlussbelegung

Pin	Cable color	Assignment
1	brown	UB
2	black	GND
3	blue	Pulses +
4	beige	Data +
5	green	ZERO
6	yellow	Data -
7	violet	Pulses -
8	brown/yellow	$\overline{\text{DATAVALID}}$
9	pink	UP/ $\overline{\text{DOWN}}$
10	black/yellow	$\overline{\text{DATAVALID MT}}$
11	-	-
12	-	-



Please use leads twisted in pairs for extension cables.

Inputs

Control signals UP/DOWN and Zero

Level High > 0.7UB

Level Low < 0.3UB

Connection: UP/DOWN input with 10kohms to UB, zeroing input with 10kohms to GND.

SSI pulse

Optocoupler inputs for electrical isolation

Outputs

SSI data RS485 driver

Diagnostic outputs


Push-pull outputs are short-circuit-proof

Level High > UB -3.5V (with I = -20mA)

Level Low $\leq 0.5V$ (with I = 20mA)

CANopen features

Bus protocol	CANopen
Device profile	CANopen - CiA DSP 406, V 3.0
CANopen Features	Device Class 2, CAN 2.0B
Operating modes (with SDO progr.)	<p>Polling Mode (asynch, via SDO)</p> <p>Cyclic Mode (asynch-cyclic) The encoder cyclically sends the current process actual value without a request by a master. The cycle time can be parameterized for values between 1 and 65535 ms. Synch Mode (synch-cyclic) The encoder sends the current actual process value after receiving a synch telegram sent by a master. The synch counter in the encoder can be parameterized so that the position value is not sent until after a defined number of synch telegrams.</p> <p>Acyclic Mode (synch-acyclic)</p>
Preset value	With the "Preset" parameter the encoder can be set to a desired actual process value that corresponds to the defined axis position of the system. The offset value between the encoder zero point and the mechanical zero point of the system is saved in the encoder.
Rotating direction	With the operating parameter the rotating direction in which the output code is to increase or decrease can be parameterized. Scaling The steps per revolution and the total revolution can be parameterized.
Scaling:	The steps per revolution and the total revolution can be parameterized.
Diagnose	<p>The encoder supports the following error messages:</p> <ul style="list-style-type: none"> - Position and parameter error - Lithium cell voltage at lower limit (Multiturn)
Default setting	50kbit/s, node number 1

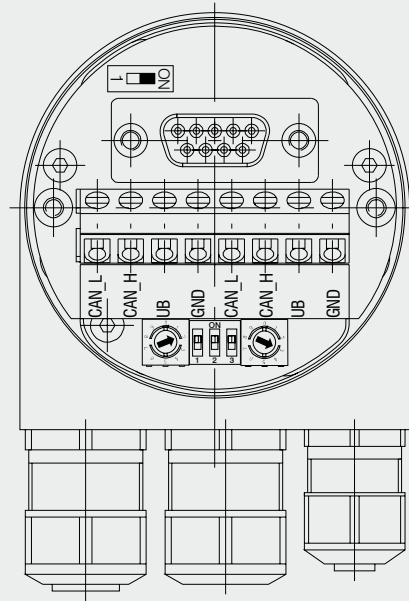

Setting of terminating Resistor for CANopen



ON = Last user
OFF = User X

Setting CANopen baud rate

Baud rate	Setting Dip Switch		
	1	2	3
10kBit/s	OFF	OFF	OFF
20kBit/s	OFF	OFF	ON
50kBit/s	OFF	ON	OFF
125kBit/s	OFF	ON	ON
250kBit/s	ON	OFF	OFF
500kBit/s	ON	OFF	ON
800kBit/s	ON	ON	OFF
1MBit/s	ON	ON	ON


Contact description CANopen

CAN_L	CAN Bus Signal (dominant Low)
CAN_H	CAN Bus Signal (dominant High)
UB	Versorgungsspannung 10...30VDC
GND	Ground contact for UB

(Terminals with the same designation are internally interconnected)

Settings of user address for CANopen


Address can be set with rotary switch. Example: User address 23

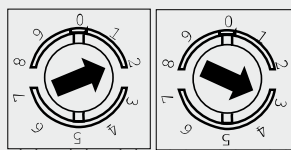

Output specifications Profibus

Profibus-DP features

Bus protocol	Profibus-DP
Profibus features	Device Class 1 and 2
Data exch. functions	Input: Position value Additional parameterized speed signal (readout of the current rotary speed) Output: Preset value
Preset value	With the "Preset" parameter the encoder can be set to a desired actual value that corresponds to the defined axis position of the system.
Parameter functions	Rotating direction: With the operating parameter the rotating direction for which the output code is to increase or decrease can be parameterized.
Diagnose	The encoder supports the following error messages: - Position error - Lithium cell voltage at lower limit (Multiturn)
Default setting	User address 00

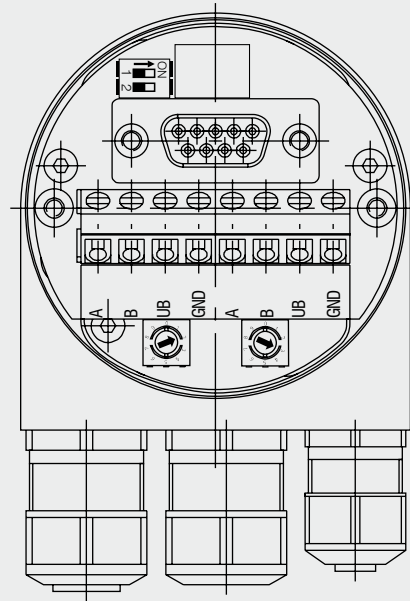


Settings of terminating resistors for Profibus-DP



ON = last user
OFF = user X

Settings of user address for Profibus-DP

Address can be set with rotary switch. Example: User address 23

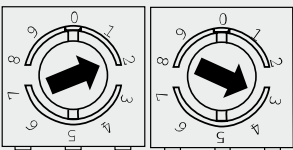


Contact description Profibus-DP

A	A negative serial data line
B	Positive serial data line
UB	Supply voltage 10...30VDC
GND	Ground contact for UB

(Terminals with the same designation are internally interconnected)

Signal output

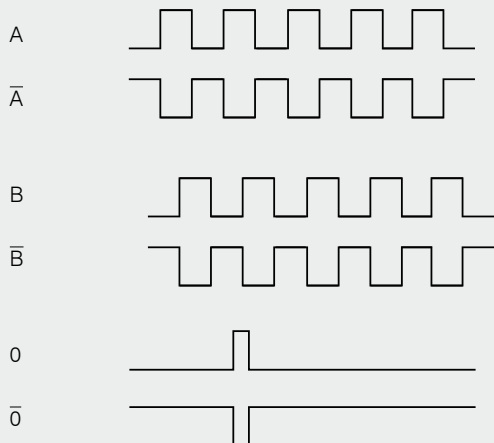

Output TTL

Linedriver (5VDC)

Level High	$\geq 2.5V$	(with $I = -20mA$)
Level Low	$\leq 0.5V$	(with $I = 20mA$)
Load High	$\leq 20mA$	
Output	A, \bar{A} , B, \bar{B} , O	

Output HTL

Push-pull (10 ... 30VDC)

Level High	$\geq UB - 3V$	(with $I = -20mA$)
Level Low	$\leq 1.5V$	(with $I = 20mA$)
Load High	$\leq 40mA$	
Output	A, \bar{A} , B, \bar{B} , O	

Output E

Push-pull (5VDC)

Level High	$UB - 2.5V$
Level Low	$\leq 0.5V$
Load High	$\leq 50mA$
Output	A, B, O


Output E830

Push-pull (8 ... 30VDC)

Level High	$UB - 3V$
Level Low	$\leq 2.5V$
Load High	$\leq 50mA$
Output	A, B, O

Pin assignment TTL, HTL

Pin	Cable color	Assignment
1	pink	B inv.
2	blue	UB Sense
3	red	N (Nullimpulses)
4	black	N inv. (Nullimpulses inv.)
5	brown	A
6	green	A inv.
7	-	-
8	grey	B
9	-	-
10	white/green	GND
11	white	GND Sense
12	brown/green	UB



Pin 2 and Pin 12 are internally connected as well as Pin 11 and 10.
For cable length > 10m twisted pair wires are required.


Connection assignment E, E830

Pin	Cable color	Assignment
-	white	0V
-	brown	+UB
-	green	A
-	-	\bar{A}
-	yellow	B
-	-	\bar{B}
-	grey	O

High performance sensors made by Micro-Epsilon



Sensors and systems for displacement and position

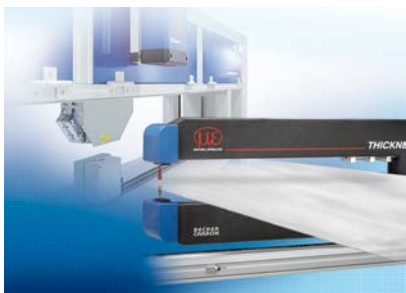

Measurement and inspection systems for quality assurance



Sensors and measurement devices for non-contact temperature measurement



Optical micrometers, fibre optic sensors and fibre optics



2D/3D profile sensors (laser scanner)



Colour recognition sensors, LED analyzers and colour online spectrometer



MICRO-EPSILON Headquarters
Koenigbacher Str. 15 · 94496 Ortenburg / Germany
Tel. +49 (0) 8542 / 168-0 · Fax +49 (0) 8542 / 168-90
info@micro-epsilon.com · www.micro-epsilon.com

MICRO-EPSILON UK Ltd.
No.1 Shorelines Building · Shore Road · Birkenhead · CH41 1AU
Phone +44 (0) 151 355 6070 · Fax +44 (0) 151 355 6075
info@micro-epsilon.co.uk · www.micro-epsilon.co.uk