



More Precision

scanCONTROL // 2D/3D laser scanner (laser profile sensors)





- z-axis measuring range up to 265mm
- x-axis measuring range up to 143.5mm
- Profile frequency up to 2,000Hz
- Measuring rate up to 2,560,000 points/sec
- z-axis reference resolution from 1µm
- Resolution x-axis up to 1,280 points
- Also available with blue laser

Compact design for precise measurement tasks

The design of the LLT29xx series is focussed on minimal size and low weight. The controller is integrated in the housing, simplifying cabling arrangements and mechanical integration. Due to its compact design and the high profile resolution, the 29xx series is especially suitable for static, dynamic and robotic applications.

Interfaces for universal integration

The multi-function port can be used for power supply, as data output, for switching parameters, as trigger input or for synchronizing several scanCONTROL sensors. During synchronous operation, an integrated mode can be used to operate the sensors alternately compensating for overlapping laser lines.

One scanner is measuring whilst the other laser line is switched off. The scanners can be supplied via Ethernet if necessary. If Industrial Ethernet is used as data output, only one cable will remain that connects the sensor to the periphery.

All SMART and GAP classes enable to transfer the measurement results via different output types: Ethernet (UDP, Modbus TCP), serial (ASCII, Modbus RTU) or using the Output Unit as analogue signal or digital switch signal.

Also available with blue laser

The Blue Laser technology uses a laser diode with a shorter wavelength of 405nm. The outstanding characteristics of this wavelength range enable reliable measurements to be made that to date have been difficult to achieve using red laser scanners. Its advantages can be seen particularly well on red-hot glowing metals, (semi-) transparent and organic materials.





Short measuring range

The laser line of only 10mm enables to reliably detect smallest details. The high profile resolution combined with the blue laser line allow for maximum precision destined for versatile applications, e.g. in the electronics production.

Article description structure

LLT	29	00	-25	/SI
<p>Options /SI = integrated laser switch-off /PT = integrated pigtail cable 0.25 m /3B = 3B laser class /BL = Blue Laser (blue-violet laser line)</p> <p>Measuring range 10mm (only Blue Laser) 25mm 50mm 100mm</p> <p>Class 00=COMPACT 10=SMART 11=GAP 50=HIGHSPEED</p> <p>Series LLT29xx</p>				

Options*

/SI	Integrated laser switch-off	/PT	Pigtail cable
	Hardware switch-off of the laser line		0.25m long cable directly out of the sensor
/3B	3B laser class	/BL	Blue laser line
	Improved laser power (20mW) e.g. for dark surfaces		Blue laser line (405nm) for (semi-) transparent, red-hot glowing and organic materials

*Options can be combined

Model		LLT	29xx-10/BL	29xx-25	29xx-50	29xx-100
z-axis (height)	Standard measuring range	Start of measuring range	52.5mm	53.5mm	70mm	190mm
		Midrange	56.5mm	66mm	95mm	240mm
		End of measuring range	60.5mm	78.5mm	120mm	290mm
		Height of measuring range	8mm	25mm	50mm	100mm
	Extended measuring range	Start of measuring range	-	53mm	65mm	125mm
		End of measuring range	-	79mm	125mm	390mm
	Linearity ¹⁾	(2sigma)	±0.17% FSO	±0.10% FSO	±0.10% FSO	±0.10% FSO
	Reference resolution ^{2) 3)}		1µm	2µm	4µm	12µm
x-axis (width)	Standard measuring range	Start of measuring range	9.4mm	23.4mm	42mm	83.1mm
		Midrange	10mm	25mm	50mm	100mm
		End of measuring range	10.7mm	29.1mm	58mm	120.8mm
	Extended measuring range	Start of measuring range	-	23.2mm	40mm	58.5mm
		End of measuring range	-	29.3mm	60mm	143.5mm
	Resolution x-axis		1,280 points/profile			
Profile frequency	COMPACT / SMART / GAP	up to 300Hz				
	HIGHSPEED	up to 2,000Hz				
Interfaces	Multi function port	Ethernet GigE-Vision	Output of measurement values Sensor control Profile data transmission			
		Digital inputs	Mode switching Encoder Trigger			
		RS422 (half-duplex)	Output of measurement values Sensor control Trigger Synchronisation			
Output of measurement values		Ethernet (UDP / Modbus TCP) RS422 (ASCII / Modbus RTU) ⁴⁾ Analogue ⁵⁾ Switch signal ⁵⁾				
Display (LED)		1x laser ON/OFF, 1x power/error/status				
Light source	standard	Semiconductor laser 405nm (blue)	Semiconductor laser 658nm (red)			
	optional	-	Semiconductor laser 405nm (blue)			
Aperture angle laser line		10°	20°	25°	25°	
Laser power	standard	≤ 8mW (2M laser class)				
	optional	-	≤ 20mw (3B laser class)			
Integrated laser switch-off	optional	Safety interlock, hardware switch-off				
Permissible ambient light (fluorescent light) ²⁾		10,000lx				
Protection class (sensor)		IP 65				
EMC		acc. EN 61326-1: 2006-10 DIN EN 55011: 2007-11 (group 1, B class) EN 61000-6-2: 2006-03				
Vibration		2g / 20 ... 500Hz				
Shock		15g / 6ms				
Operating temperature		0°C to 45°C				
Storage temperature		-20°C to 70°C				
Dimensions		96 x 118.5 x 33mm	96 x 85 x 33mm			
Weight sensor (without cable)		440g	380g			
Supply		11-30VDC, 24V, 500mA, IEEE 802.3af class 2, Power over Ethernet				

¹⁾ Standard measuring range

²⁾ Measuring object: Micro-Epsilon standard object (metallic, diffusely reflecting material)


³⁾ According to a one-time averaging across the measuring field (640 points)

⁴⁾ RS422 interface, programmable as serial interface or input for triggering / synchronisation


⁵⁾ Only with Output Unit

FSO = Full scale output


LLT29xx-10/BL

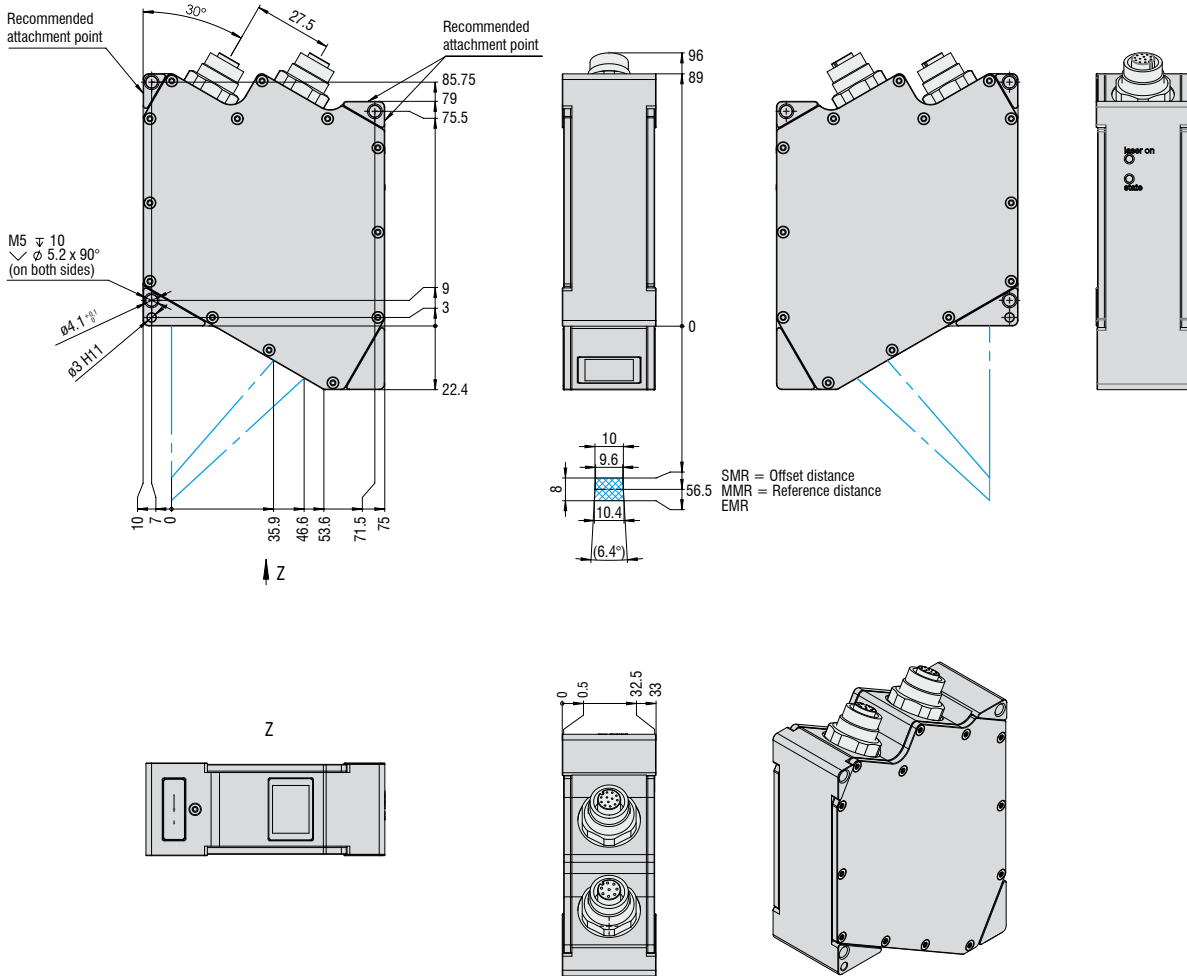

LLT26xx/29xx-25

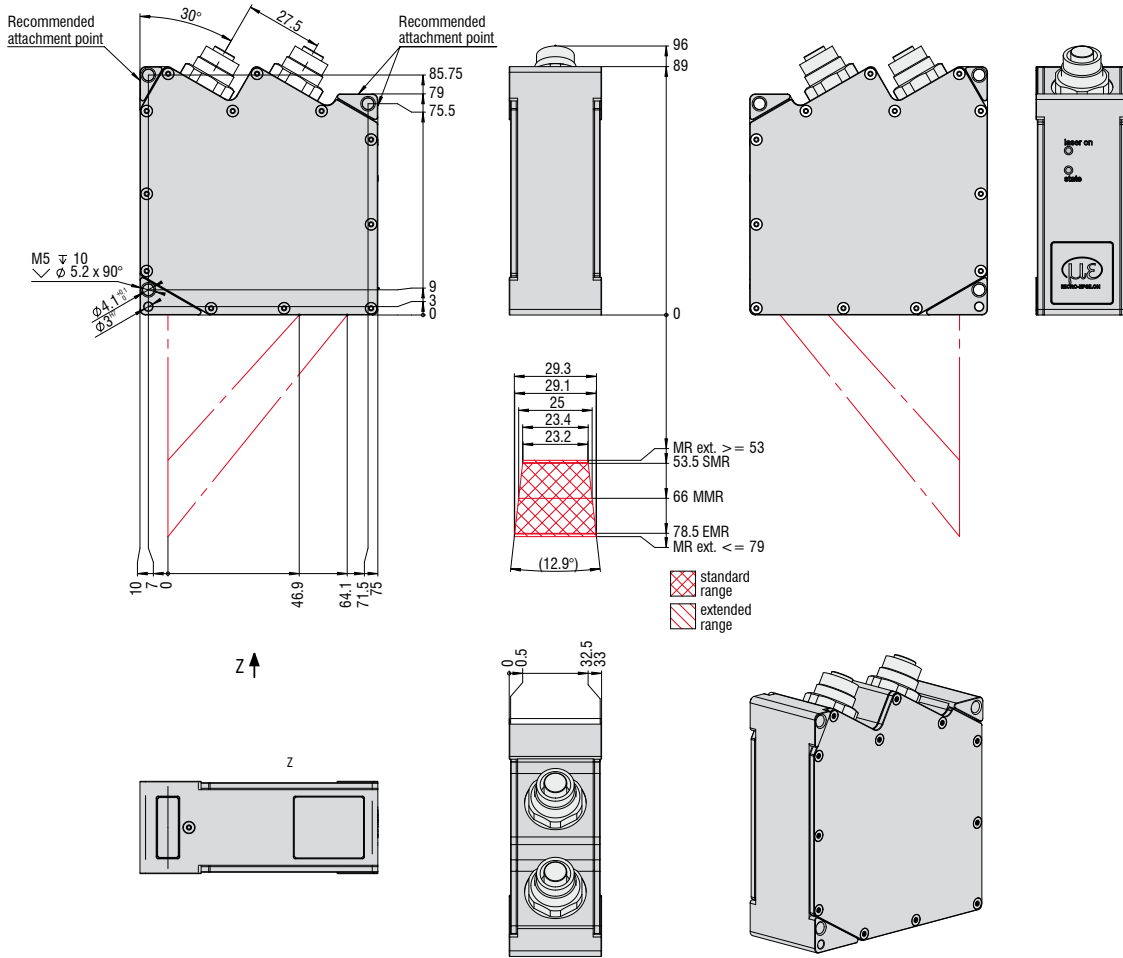


LLT26xx/29xx-50

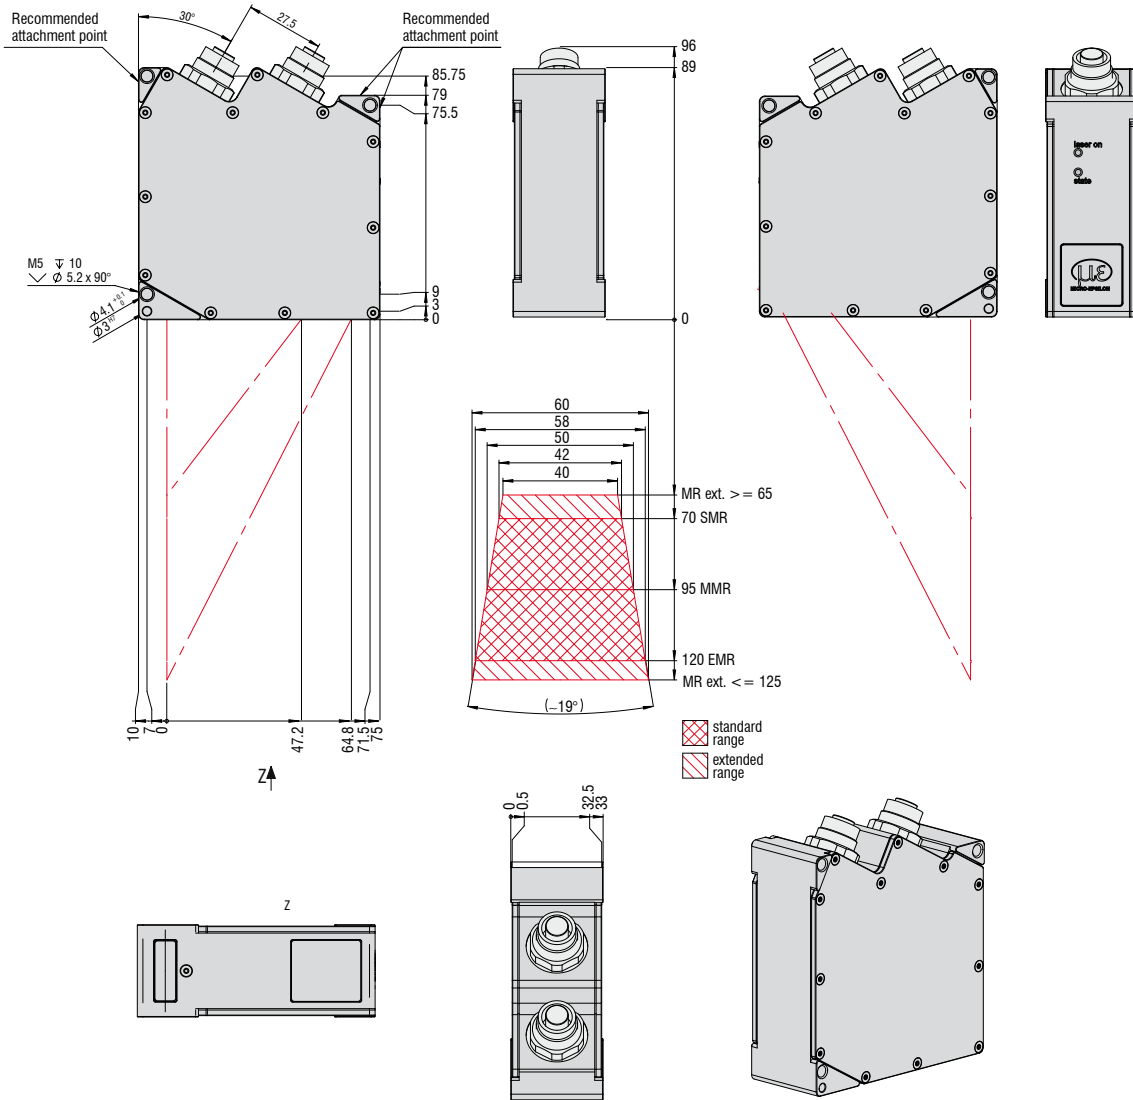


Output Unit for all scanners of the SMART and GAP classes

The scanCONTROL Output Unit is addressed via Ethernet and outputs analogue and digital signals. Different output terminals can be connected to the fieldbus coupler.

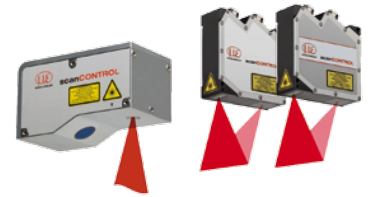


Output Unit


OU fieldbus coupler

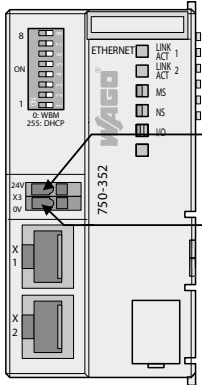


OU filter module

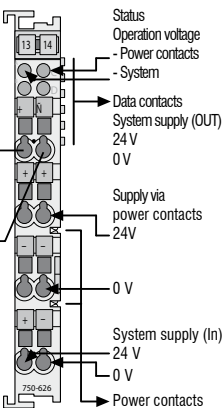


Digital output module

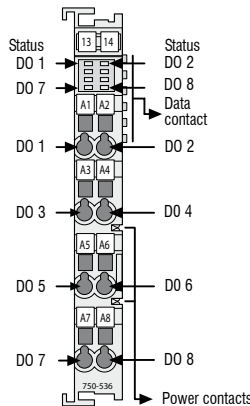

Analogue output module

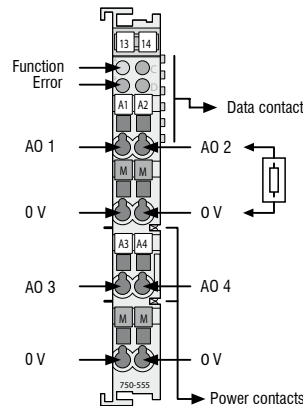

OU bus termination module



Output modules for Output Unit Basic
digital:
24V positive switching
24V negative switching
5V positive switching

Analogue output for Output Unit Basic
analog:
±10V
0-10V
0-20mA
4-20mA

Output Unit

- 6414073 Output Unit Basic/ET
- 0325131 OU-DigitalOut/8-channel/DC24V/0.5A/negative
- 0325115 OU-DigitalOut/8-channel/DC24V/0.5A/positive
- 0325116 OU-AnalogOut/4-channel/±10V
- 0325135 OU-AnalogOut/4-channel/0-10V
- 0325132 OU-AnalogOut/4-channel/0-20mA
- 0325133 OU-AnalogOut/4-channel/4-20mA


- Fieldbus coupler with filter module and bus end terminal
- 8-channel digital output terminal; DC 24V; 0.5A; negative switching;
- 8-channel digital output terminal; DC 24V; 0.5A; positive switching
- 4-channel analogue output terminal; ±10V
- 4-channel analogue output terminal; 0-10V
- 4-channel analogue output terminal; 0-20mA
- 4-channel analogue output terminal; 4-20mA

Further terminals are available on request.

Connection cable

Multi-function cable


For power supply, digital inputs (TIL or HTL), RS422 (half-duplex)

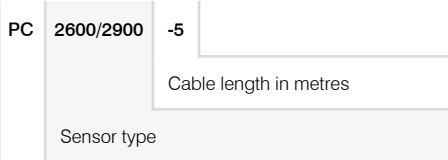

PC = Multi-function cable qualified for drag chain use
PCR = Multi-function cable suitable for use with robots

Ethernet connection cable

For parameter set up, value and profile transmission

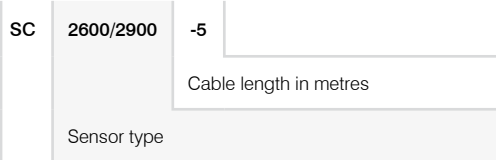

SC = Ethernet connection cable qualified for drag chain use
SCR = Ethernet connection cable suitable for use with robots




Accessories

Art. No. Model


- 0323478 Connector/12-pol/LLT2600-2900/PS/RS422/DigIN
- 0323479 Connector/8-pol/LLT2600-2900/Ethernet
- 2420067 PS2600/2900
- 0254072 Suitcase scanCONTROL 26/27/29 MR 10-100

Description

- Connector multi-function port for scanCONTROL series LLT26xx and 29xx
- Connector for Ethernet socket for scanCONTROL series LLT26xx and 29xx
- Power supply unit for scanCONTROL 2600/2900
- Transport suitcase for scanCONTROL sensors, incl. measuring stand

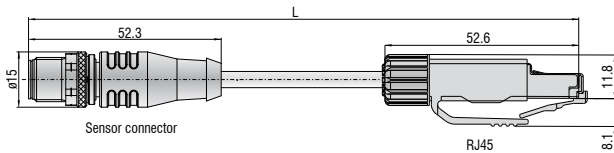

Ethernet connection cable

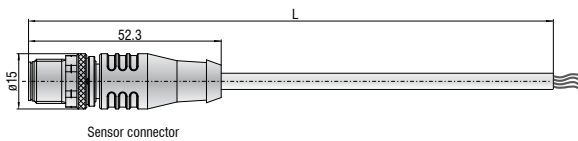



Multi-function cable

Protection and cooling housing for LLT26xx and 29xx





Protection housing including blow-out system

Art. No.: 2105058

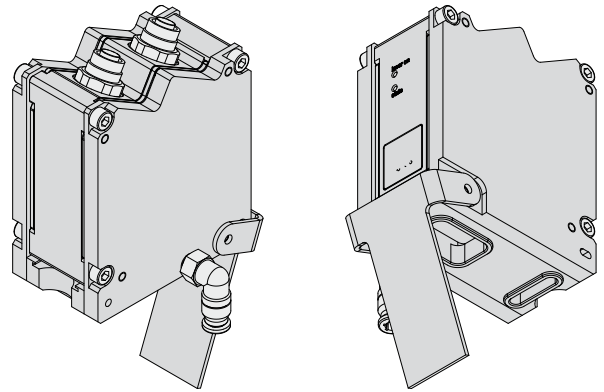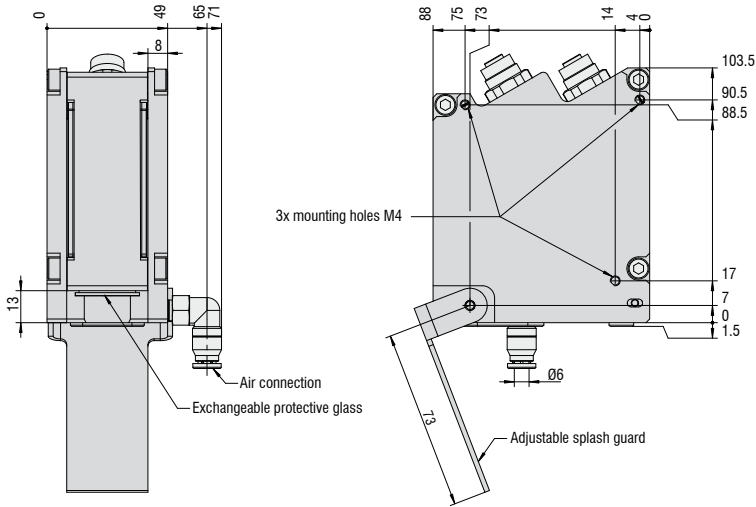

Protection housing including blow-out system and water cooling

Art. No.: 2105059

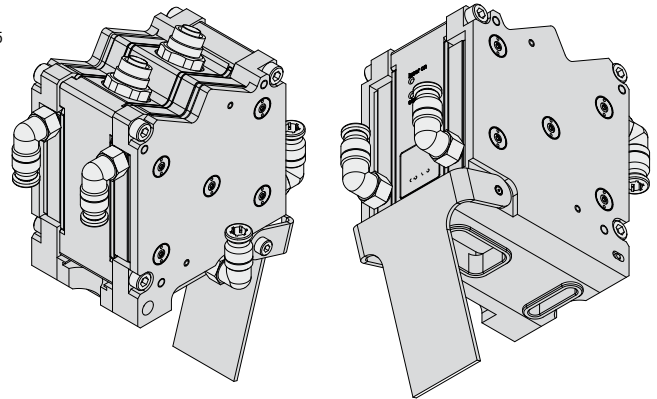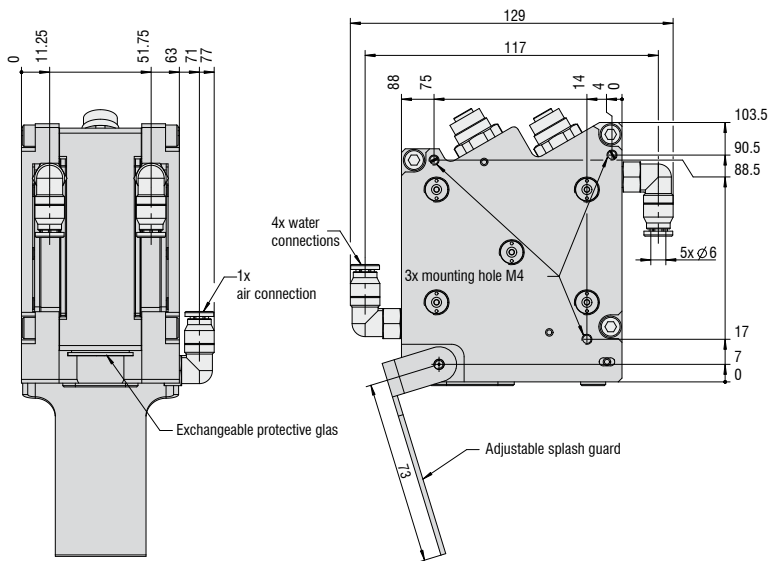

High performance sensors made by Micro-Epsilon



Sensors and systems for displacement and position



Sensors and measurement devices for non-contact temperature measurement



2D/3D profile sensors (laser scanner)



Optical micrometers, fibre optic sensors and fibre optics



Colour recognition sensors, LED analyzers and colour online spectrometer



Measurement and inspection systems

